



HANSEO

COMPANY INTRODUCTION



HANSEO



04

ABOUT HANSEO

- 01 ABOUT HANSEO
- 03 HISTORY
- 04 ALL-IN-ONE SERVICE PATENT PATENTS
- 05 & CERTIFICATION

11

PRODUCT LINE-UP

- 08 GENERAL FILM
- 10 OXO-BIODEGRADABLE FILM
- 11 BATTERY FILM
- 12 CPP FOR POUCH CELL / SEALING FILM FOR ELECTRODE
- 13 THERMAL LAMINATING FILM (TLF)
- 14 COLOR THERMAL LAMINATING FILM
- 15 THERMAL PROTECTIVE FILM
- 16 SUPER BONDING FILM (SBF)
- 17 CLEANING FILM / PROCESS FILM

18

PP DECORATIVE FILM

- 19 THE DISTINCTIVE VALUE OF ECO-FRIENDLY PP FILM FOR DECORATIVE SHEET
- 20 SOFTFEEL COLOR DESIGN PP FILM
- 21 HIGH WEATHER-RESISTANCE PP DECORATIVE SHEET
PP DECORATIVE SHEET FOR FLOORING
- 22 PP DECORATIVE SHEET FOR STEEL PLATE LAMINATION
SUPER BONDING PP FILM FOR STEEL PLATE LAMINATION
FABRIC DECORATIVE SHEET

23

MANUFACTURING PROCESS

- 23 MANUFACTURING PROCESS
- 24 MANUFACTURING EQUIPMENT OVERVIEW



• HANSEO

An advanced materials development and manufacturing company specializing in CPP-based battery films, protective films for steel plate lamination, and interior and exterior decorative films.

HANSEO MICRON began in 1999 as a distributor handling a wide range of films, including PET, OPP, and nylon. In 2004, the company chose the value of manufacturing and transitioned into a CPP film manufacturer, continuing steady growth for over 20 years.

Even amid an uncertain business environment, HANSEO MICRON has strengthened its quality competitiveness through continuous investment, diversified its product portfolio, and pioneered new blue-ocean markets.

As a result, in 2007 the company expanded and installed the largest single extrusion line in Korea, which has been operating reliably ever since.

In 2019, HANSEO MICRON founded The Ham Build Co., Ltd. and took on a new challenge by developing Korea's first eco-friendly PP decorative film under the "DAGREEN" brand.

These efforts and accumulated technological capabilities have become a driving force behind the advancement of Korea's materials industry and now serve as the core foundation supporting HANSEO MICRON today.

Going forward, HANSEO MICRON will continue to grow as a company that meets customer expectations, guided by eco-friendly values and a customer-centric philosophy.



HANSEO
PRODUCT LINE-UP

01

SUPER BONDING
PP FILM FOR STEEL
PLATE LAMINATION

02

THERMAL
PROTECTIVE
FILM FOR STEEL
PLATE

03

GRS-CERTIFIED
RECYCLED FILM



04

FOOD PACKAGING
FILM / EASY-PEEL
FILM FOR FOOD
APPLICATION

05

SECONDARY
BATTERY FILM
INSULATING FILM FOR
CELL TABS FOR
POUCH CELLS

06

OXO-
BIODEGRADABLE
FILM
OXO-
BIODEGRADABLE FILM

07

PP DESIGN
FILM FOR INTERIOR
AND EXTERIOR
APPLICATION

08

HIGH WEATHER-
RESISTANCE PP
DECORATIVE SHEET
FLOORING
& FURNITURE USE

 MAIN INDUSTRY CODES OF HANSEO

INDUSTRY CODE	KOREAN STANDARD INDUSTRIAL CLASSIFICATION	DESCRIPTION
241320	20202	• Manufacture of synthetic resins and other plastic materials • Advanced industry classification: High-performance polymer new materials (special functional materials, electrical property materials, medical-use materials) and super-polymer composite materials
252403	22291	• Manufacture of plastic laminated, coated, and other surface-treated products • Advanced industry classification: Surface treatment (lamination, coating, etc.) of transparent conductive films, plastic films, sheets, plates, pipes, and other plastic products
252404	22292	• Manufacture of plastic laminated, coated, and other surface-treated products • Transparent conductive films and plastic laminated (multilayer) films (including lamination, coating, and other surface treatments)



HANSEO

1999

- Establishment of HANSEO FILM Co., Ltd. in Sindang-dong, Jung District, Seoul.

2004

- Renaming to HANSEOMICRON Co., Ltd.
- Transfer/Completion of the Gwangju Plant
- Installation of CPP film extrusion line no. 1

2007

- Expansion with CPP film extrusion line no. 2

2013

- Development of oxo-biodegradable film and acquisition of related patents
- Commencement of supply to Samsung Electronics and its tier-1 vendors

2014

- Acquisition of international certifications for oxo-biodegradable film and supply to LG Electronics

2015

- Establishment of HANSEO VINA in Bac Ninh, Hanoi, Vietnam

2017

- Establishment of the Cleaning Business Division
- Commencement of supply of leading carrier film for polarizer applications to Samsung SDI and LG Chem

2018

- Commencement of supply of specialty paper for mobile phone boxes to Samsung Electronics

2019

- Production of decorative sheets for interior & exterior decorative / decorative films for special fabric materials

HANSEO ALL-IN-ONE SERVICE

01

FILM MANUFACTURING & DISTRIBUTION

CATEGORY	SUBCATEGORY
CPP	• General CPP • Metallized CPP • Specialty CPP • LCP Film • ECP (easy-peel) film
OPP	• Metallized OPP • Specialty OPP • Co-extruded OPP • White OPP • Matt OPP • TSF OPP
PET	• For general packaging use • For advertising use • For process protection / release use • For decorative sheet use • for anti-static use • For general industrial use
NYLON	• For general packaging use • For pharmaceutical use • For retort use • For differential adhesion use • For battery use

02

PRINTING & PROCESSING

FILM PROCESSING	PRINTING
• Co-Extrusion Cast Film Line(#2) • Recycling Machine • Printing • Slitter #3ea. • Corona • Ageing Room	• Gravure printing machine (8-color / 6-color) • Master machine • Dry laminator • Folding machine • M-fold bottom / zipper stand-up pouch • Three-side sealing machine • Slitter • Laminating machine no. 1 and no. 2 • Punching machine • Latest-generation dry laminator / laminating machine • Large two-side sealing machine • Double-hanging type • Double-side type • Three-side equipment • Sealing machine

03

PRODUCT APPLICATION

CATEGORY	DETAILED APPLICATIONS
FOOD	• Noodles / soup products • Snack products / processed meat & imitation crab products • Coffee packaging • Retort & pouch packaging • Triangular Gimbap packaging • Seasonings / Seasoning powders (e.g., Dasida) • Frying mixes & salt products • Candy wrappers & ice bar packaging • Easy-peel fpackaging materials • Microwaveable standing pouches
HOUSEHOLD PRODUCTS	• Detergents packaging • Label materials • Agrochemical / seed packaging • Refill bag
FUNCTIONAL PACKAGING	• Transparent high-barrier packaging • Hygienic & pharmaceutical packaging / IV bags • Industrial packaging materials • Packaging for electronic & industrial components • Eco-friendly packaging

HANSEO PATENTS AND CERTIFICATIONS



Patent for
Oxo-Biodegradable Film



Patent for Super Bonding




ISO 14001:2015



ISO 9001:2015



ISO 9001:2015

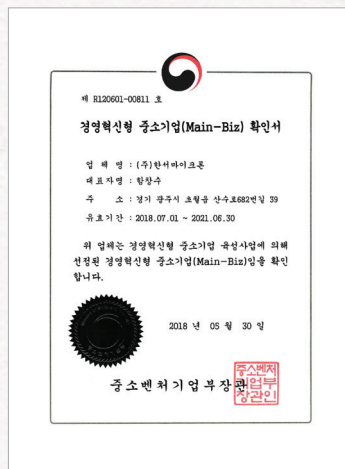

Certification of a Management
Innovation SME (MAIN-Biz)



Test Report on Hazardous
Substance Emissions

OTHER PATENTS

SUPER BONDING

Polyolefin resin film and sheet having ultra-high-strength bonding properties using the same

DECORATIVE FILM TEST REPORT ON HAZARDOUS SUBSTANCES

DECORATIVE SHEET (FOUNDATION PATENT)

Decorative sheet including a triple-layer polyolefin-based resin film

PROTECTIVE FILM FOR IV BAGS

Resin composition for protective films and medical protective film using the same

HIGH WEATHER- RESISTANCE DECORATIVE SHEET

Polyolefin-based resin film and decorative film and decorative sheet using the same

HANSEO PATENTS & CERTIFICATIONS




HANSEO CERTIFICATIONS & PATENTS

HANSEO obtained the Global Recycled Standard (GRS) certification mark in 2023. The GRS certification applies to products containing recycled materials and ensures continuous traceability and compliance throughout the entire supply chain, from raw material collection and processing to the manufacturing and sale of finished products, through rigorous audits at every stage. The GRS logo is an internationally recognized certification mark that may be used only on products containing 50% or more recycled materials.

CERTIFIED FILMS

- CPP FLIM
- OPP FLIM

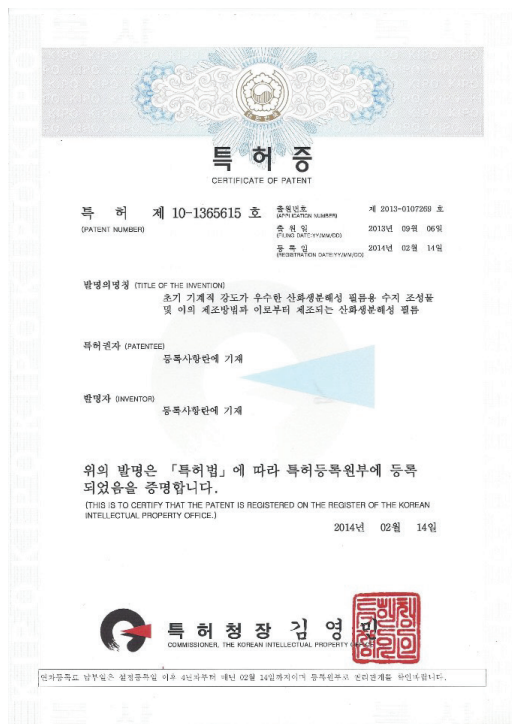



HANSEO

MAIN PRODUCTS

GENERAL FILM

OXO-BIODEGRADABLE FILM

BATTERY FILM

CPP FOR POUCH CELL /
SEALING FILM FOR ELECTRODE

THERMAL LAMINATING FILM (TLF)

COLOR THERMAL LAMINATING FILM

THERMAL PROTECTIVE FILM

SUPER BONDING FILM (SBF)

CLEANING FILM / PROCESS FILM

HANSEO GENERAL FILM

ABOUT THE PRODUCT

HANSEO has secured proprietary technology capable of cleaning CPP, PET, and OPP films, and supplies cleaning films and process films required for polarizer and battery manufacturing processes used by Samsung SDI, LG Chem, and other leading companies. The company also produces polypropylene (PP)-based CPP films in-house, which are utilized as heat-sealable materials for aluminum pouches.

CPP films are suitable for a wide range of general applications, including food packaging, multi-pack packaging, and release films. Depending on the intended use, the films undergo various post-processing operations and are applied to functions such as heat sealing in packaging. Their key characteristics include excellent surface appearance, high slip performance, stable processability, reliable barrier properties, controlled opacity, and moisture resistance. In addition, these products are designed to minimize aging-related changes in slip performance and corona treatment, thereby further enhancing workability and quality stability during post-processing operations.

HANSEO'S
CORE PRODUCT
**CPP
FILMS**

**OPP
FILMS**

**PET
FILMS**

**NYLON
FILMS**

Nylon for battery applications: A product optimized for secondary battery pouches, offering high strength and well-balanced mechanical properties in both the machine direction (MD) and transverse direction (TD)



The Industry's First GRS-Certified CPP Film

HANSEO has become the first company in the film industry to obtain Global Recycled Standard (GRS) certification from Control Union, an eco-certification body headquartered in the Netherlands. Based on this certification, HANSEO produce and supply GRS-certified eco-friendly products that meet international standards, addressing the needs of global companies pursuing ESG management.



HANSEO

COMPARATIVE TEST REPORT ON THE PHYSICAL PROPERTIES OF OUR CPP FILM COMPARED TO PE

• Due to differences between PE and PP in manufacturing methods, molecular structure, density, melting point, and test specimens, a simple direct comparison is difficult

Date	Mar. 17, 2024	Description				
		Code	Thickness	Width	Length	Quantity
End User	All	CPP	Based on 50 μm	All	All	NEEDS
		PE	Based on 50 μm	All	All	NEEDS

Item		Unit	Standard	LD/LLDPE	HDPE	CPP (GRS50%)
Thickness		μm	50 $\pm$ 5%	47-53	47-53	48-52
Tensile Strength	MD	Kgf/cm ²	150 ▲	190	230	270
	TD		150 ▲	180	220	250
Elongation at break	MD	%	500 ▲	500 ▲	500 ▲	600
	TD		500 ▲	500 ▲	500 ▲	650
C.O.F		Out/Out	1.0 ▼	1.7	0.3	0.5
Wettability		Dynes	38 ▲	39	39	39
Haze		%	8 ▼	39	39	5.5
Heat sealing strength		g.f/15mm(at 128°C)	1000 ▲	1000	1300	1400
FinalResult		Pass				

THIS TEST RESULT IS PROVIDED FOR REFERENCE PURPOSES ONLY, AND
IT IS CONFIRMED THAT THE ABOVE ANALYSIS RESULTS DO NOT DIFFER FROM THE FACTS.

Quality Control (QC) Manager

HANSEO C&F CO.,LTD

HANSEO OXO-BIODEGRADABLE FILM



Eco-friendly certification from the UAE, which serves as a logistics hub for Europe and the Middle East

ABOUT THE PRODUCT

This eco-friendly film undergoes initial degradation through a primary oxidation process, followed by oxidative biodegradation by microorganisms. It is used in packaging for electrical and electronic components, consumer goods, and agricultural and marine products, and is designed to enable rapid return to nature.

In countries such as Korea, where waste management relies heavily on landfilling, rapid material reintegration into nature is particularly important. HANSEO's oxo-biodegradable film decomposes within 5 to 10 years, or within a period tailored to specific requirements depending on the usage environment and purpose, ultimately leaving only water and organic matter.

APPLICATION AREA ① Biodegradable packaging for various electronic products (exported to the UAE, including Samsung, LG, etc.)




APPLICATION AREA ② Applied across a wide range of fields, including various cushioning materials and agricultural and marine product packaging



HANSEO BATTERY FILM

High-Safety Oligomer Ion Conductor (OIC)
Polymer-Based Solid Electrolyte Film
Under a government-led development project

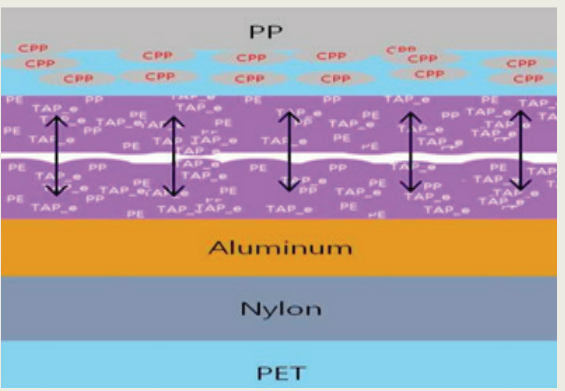


Anti-Static PET Film

Nylon Film for Battery Applications

ABOUT THE PRODUCT

This high-safety, high-efficiency polymer-based solid electrolyte film incorporates an oligomer ion conductor (OIC) engineered through molecular structure design. It overcomes the low ionic conductivity limitations of conventional polymer solid electrolytes and effectively reduces interfacial resistance between active materials within electrodes. With high compatibility with existing lithium secondary battery technologies and manufacturing processes similar to those currently in use, the film enables easy commercialization and cost-efficient production.

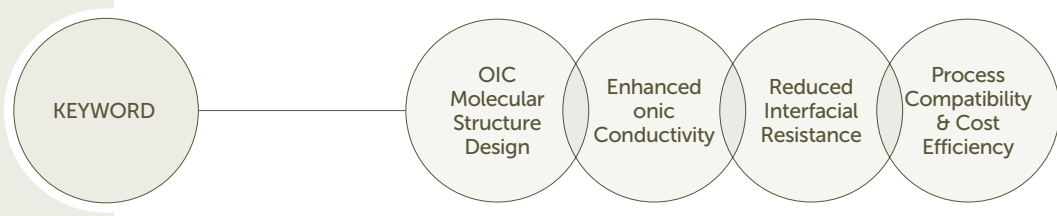


These products are coated with an anti-static agent on one or both sides, offering excellent anti-static performance along with outstanding chemical resistance and environmental durability. The surface resistivity is approximately $10^6\Omega$, and they are primarily used as protective films for mobile device manufacturing processes.

Optimized for secondary battery pouches, this film offers high strength and excellent balance of mechanical properties in both the machine direction (MD) and transverse direction (TD).

- CORE PERFORMANCE
- Excellent formability (no interlayer delamination or bursting)
 - Free from foreign matters

HANSEO CPP FOR POUCH CELL SEALING FILM FOR POUCH CELL ELECTRODE

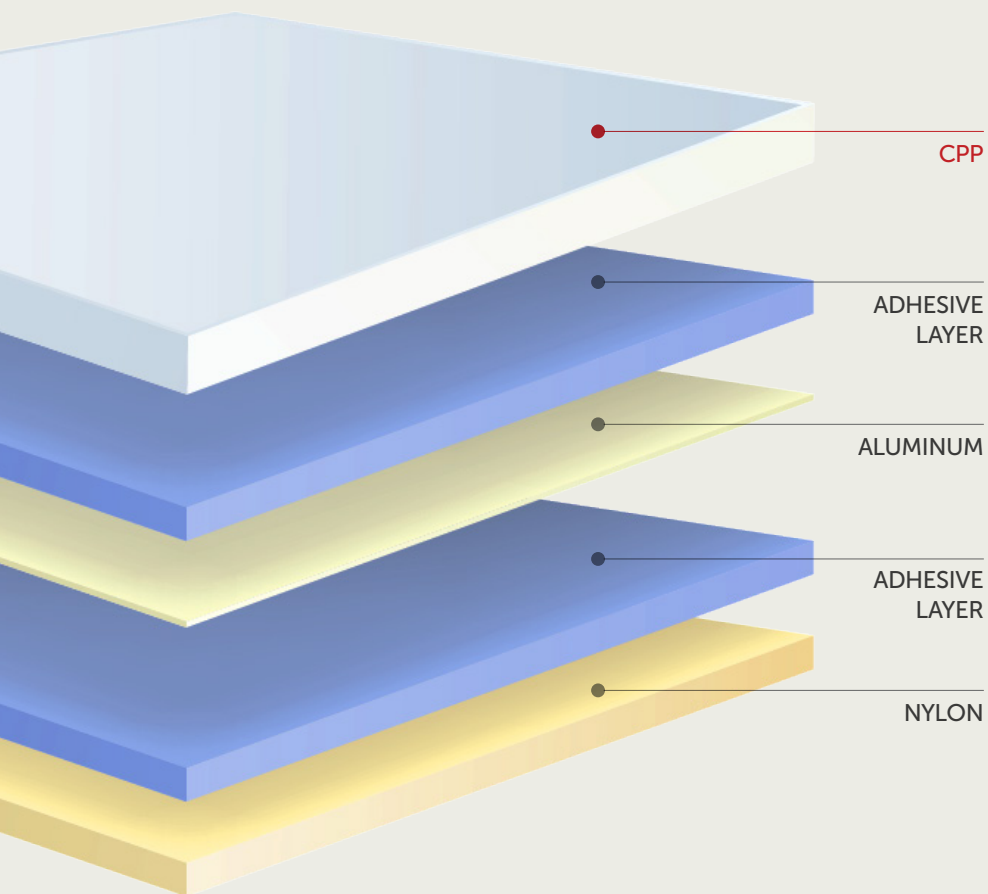

ABOUT THE PRODUCT

HANSEO possesses advanced production technology for cleaning PET and OPP films, enabling the manufacture of cleaning films and process films required for polarizer films and battery production used by Samsung SDI, LG Chem, and others.

In addition, HANSEO independently manufactures CPP films made from polypropylene (PP) resin that provide heat-sealing properties and serve as sealing materials for aluminum pouches.

HANSEO PATENT APPLICATION

Patent Application No. 10-2015-0028289

Application Date. Feb. 16, 2015

Aluminum pouch film and secondary battery including the same

Patent Application No. 10-2015-0028241

Application Date. Feb. 16, 2015

Method for manufacturing an aluminum pouch film

Patent Application No. 10-2014-0188546

Application Date Dec. 24, 2014

Polyolefin-based film, aluminum pouch including the same, and secondary battery including the same

Patent Application No. 10-2014-0188547

Application Date Dec. 24, 2014


Method for manufacturing a polyolefin-based film

Patent Application No. 10-2014-0188548

Application Date Dec. 24, 2014

Method for manufacturing a polyolefin-based film

HANSEO THERMAL LAMINATING FILM (TLF)

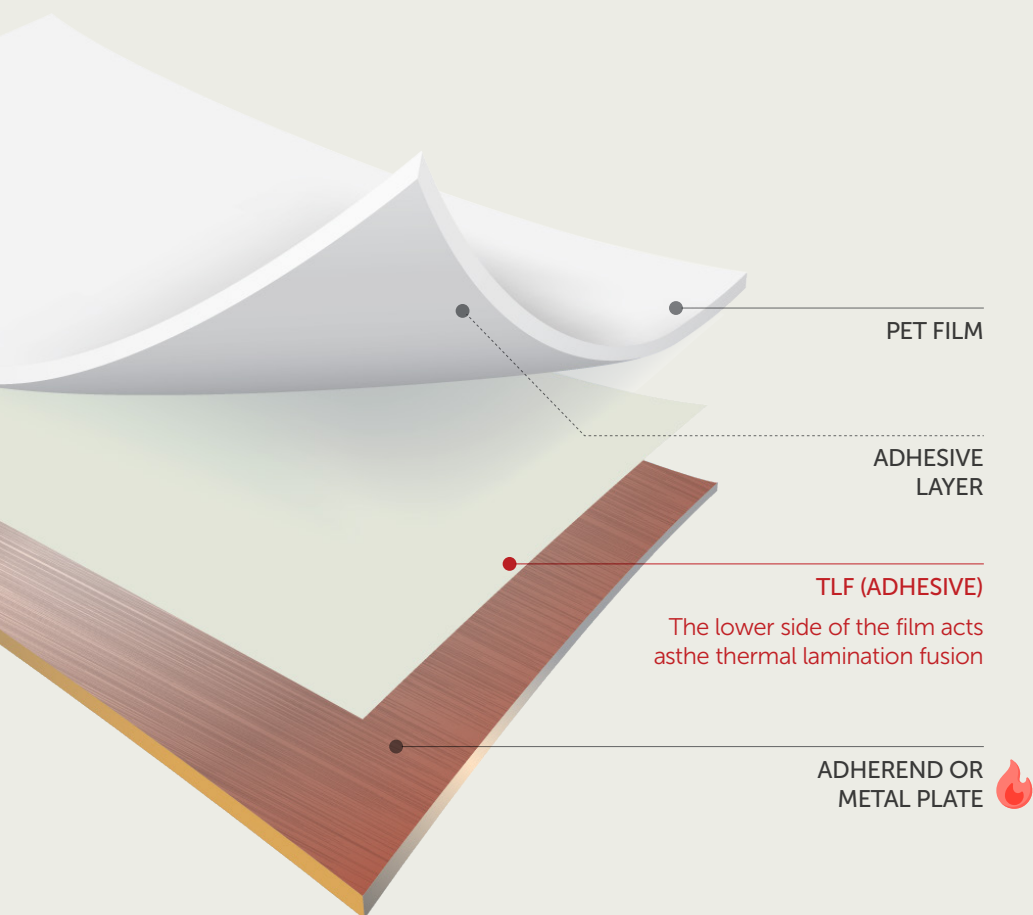

ABOUT THE PRODUCT

TLF | Thermal Laminating Film

The thermal laminating film is designed to fully integrate with the adherend (such as a heated steel plate), providing stable adhesion performance without peeling through excellent bonding strength.


TLFL | Thermal Laminating Film with Low Temperature

While maintaining the same adhesion method and performance as the TLF described above, it is designed to enable stable adhesion even under lower temperature conditions.

APPLICATIONS

- For products requiring various insulation and flame-retardant performance.
- Can be used as a substitute for color-coated steel plates for building materials.
- For processing exterior surface materials of home appliances such as washing machines and refrigerators, and for applying color, material, and finish (CMF) designs.

HANSEO COLOR THERMAL LAMINATING FILM (TLF)

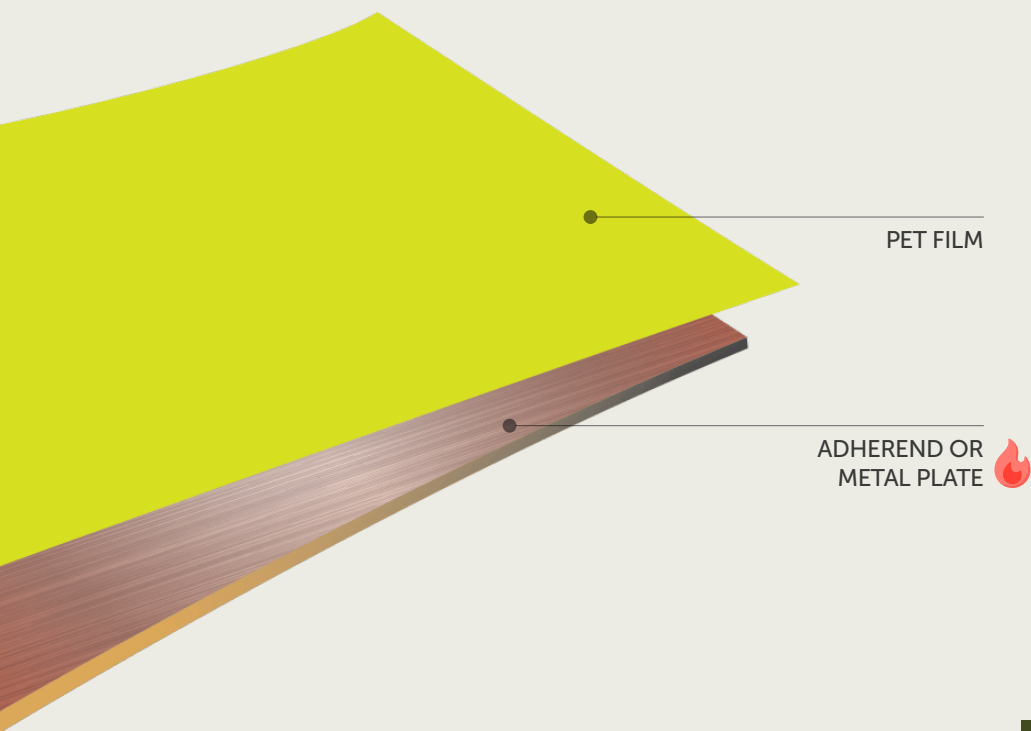

ABOUT THE PRODUCT

COLOR TLF | Color Thermal Laminating Film

An alternative to traditionally painted color-coated steel plates used in building materials.


APPLICATIONS

- **Exterior color finishing for home appliances**
Color application and surface protection for exterior metal panels of home appliances such as washing machines, refrigerators, and dishwashers
- **Metal materials for construction (color-coated steel plate replacement)**
A metal panel surface finish that replaces painted color-coated steel plates used in building materials
- **Industrial metal panels**
Color finishing for exterior metal panels of control panels, cabinets, and industrial equipment
- **B2B products requiring eco-friendly solutions and simplified processes**
Applicable to industrial and home appliance metal products that require color implementation without a painting process

KEY ADVANTAGES

- Excellent carbon emission reduction effects by eliminating the use of adhesives
- Color TLF omits the painting process, resulting in improved working environments and enhanced productivity

HANSEO THERMAL PROTECTIVE FILM

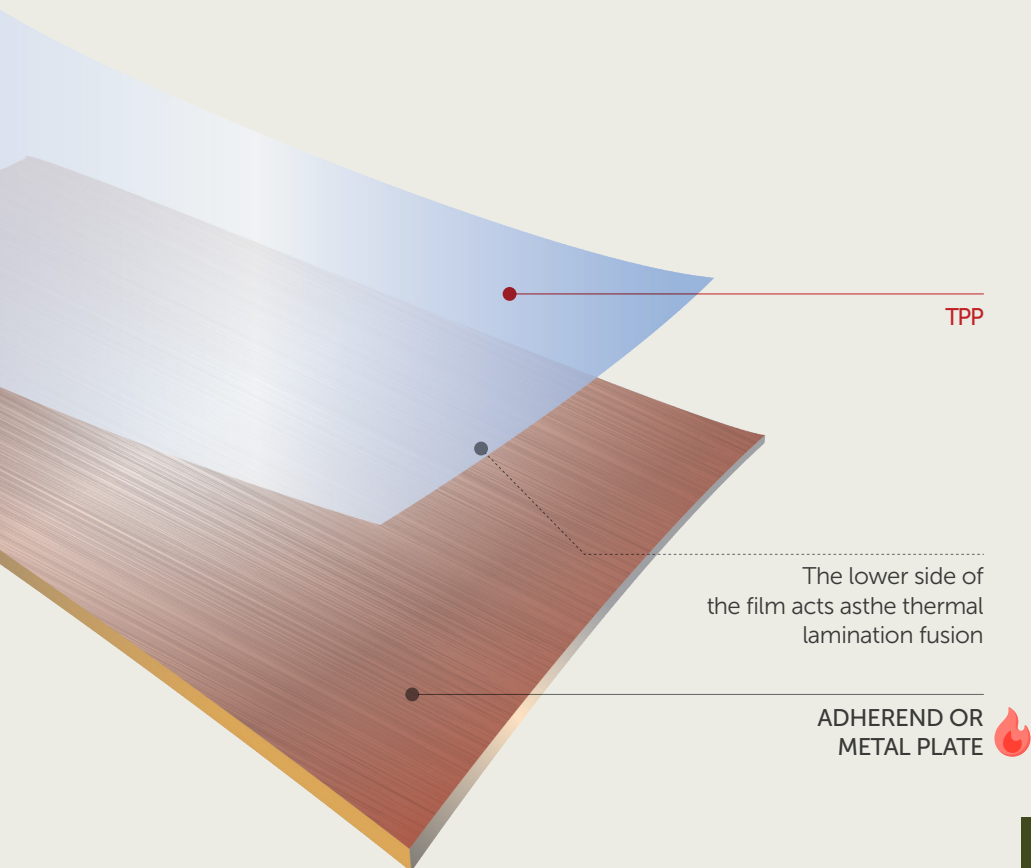

ABOUT THE PRODUCT

TPP | Thermal Protect Polyolefin

- A film that is thermally fused to the surface of steel plates, such as color-coated steel plates and cold-rolled steel plates, without the use of adhesive coatings, thereby protecting the steel surface.
- Capable of achieving the required level of adhesion strength.
- No adhesive migration or transfer to the steel surface occurs even after prolonged exposure to high temperatures and direct sunlight.

TPC | Thermal Protect Cold

- While maintaining the same adhesion method and performance as the TPP described above, this film enables fusion bonding at lower temperatures and offers enhanced cold resistance.


APPLICATIONS

- Can be used as a surface protection film for various steel plates, including color-coated steel plates

KEY ADVANTAGES

- No adhesive migration or transfer to the adherend occurs even during long-term exposure or storage in high-temperature environments
- Universally applicable regardless of whether the adherend surface is flat or embossed
- Excellent carbon emission reduction effects by eliminating the use of adhesives

HANSEO SUPER BONDING FILM (SBF)

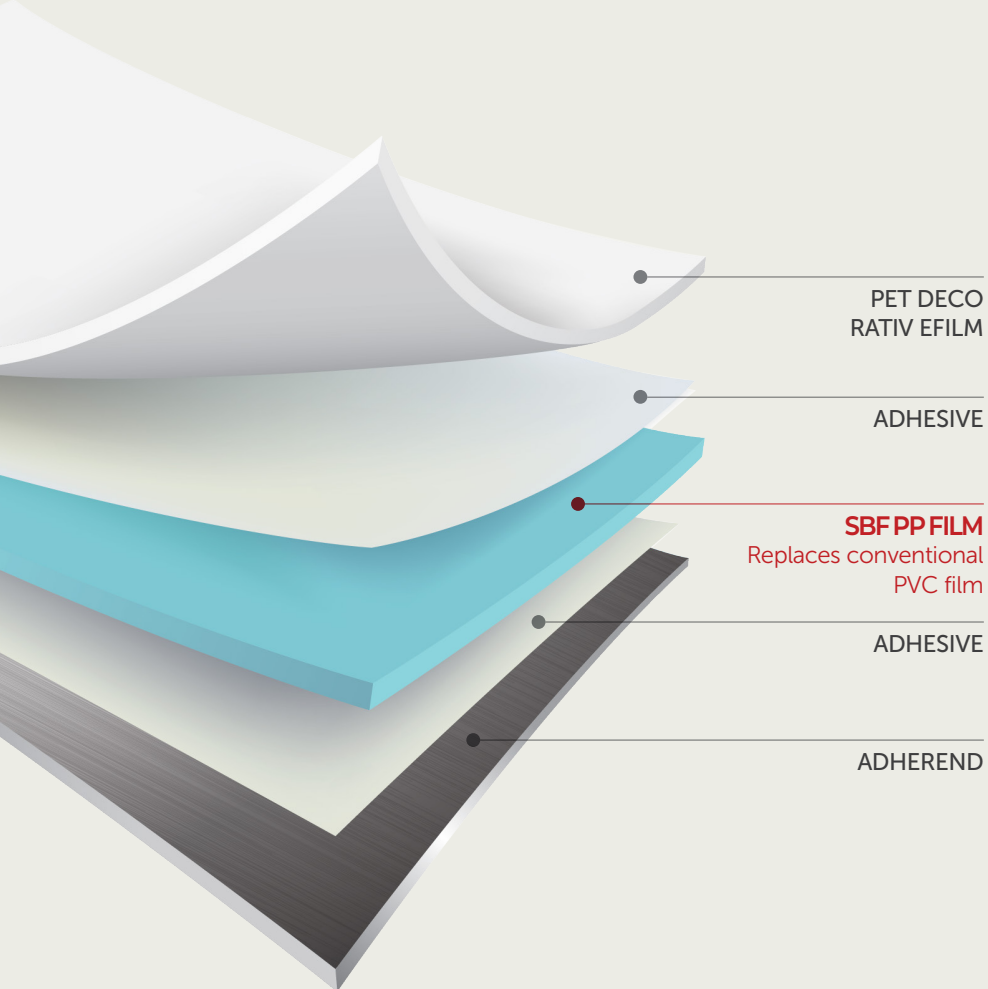

ABOUT THE PRODUCT

SBF_PP | PO Film

- The film bonded to the adherend using an adhesive.
- Strong polar functional groups are introduced into the polyolefin film to maximize adhesion to the adherend.

APPLICATIONS

- For products requiring various insulation and flame-retardant performance.
- For processing exterior surface materials of home appliances such as washing machines and refrigerators, and for applying color, material, and finish (CMF) designs.
- A function that facilitates attachment to steel plates by laminating with a PET decorative sheet for home appliances.

KEY ADVANTAGES

- Maximization of polarity
- A film with strong polar functional groups capable of replacing PVC (an eco-friendly polyolefin film)
- Excellent adhesion and peel strength

HANSEO CLEANING FILM / PROCESS FILM



ABOUT THE PRODUCT

- Used as a process material in the production of polarizing films for LCD TVs and mobile phones.
- PET or OPP films are mainly used as the base film and are applied before the use of PVA or TAC films, which are the core materials of polarizing plates.
- A process-use film that is essential for preliminary operations such as roll-to-roll alignment and coating tests in the manufacturing process.
- The first in Korea to develop an optical-grade film by applying a cleaning treatment to a general-purpose film (with outstanding effectiveness in removing fine particles from the film surface).

KEYWORD

POLARIZER
PROCESS

PET-OPP
FILM

PVA
PROTECTION

FINE DUST
REMOVAL





HANSEO

PP DECORATIVE SHEETS & FILMS FOR PP DECORATIVE SHEETS

ECO-FRIENDLY PP FILM FOR DECORATIVE SHEET

SOFTFEEL COLOR DESIGN PP FILM

HIGH WEATHER-RESISTANCE PP DECORATIVE SHEET

PP DECORATIVE SHEET FOR FLOORING

PP DECORATIVE SHEET FOR STEEL PLATE LAMINATION

SUPER BONDING PP FILM FOR STEEL PLATE LAMINATION

FABRIC DECORATIVE SHEET



HANSEO

HANSEO MICRON ECO-FRIENDLY PP FILM FOR DECORATIVE SHEETS

POLYVINYL CHLORIDE (PVC)

Polyvinyl chloride (PVC) is a polymer of vinyl chloride, in which one hydrogen atom of ethylene is substituted with a chlorine atom. It is commonly referred to as vinyl or PVC.

HIGH

- Carcinogenic substances (dioxins) are generated during combustion
- Highly toxic and strongly corrosive hydrogen chloride gas is generated

LOW

- PVC has very poor gas barrier properties

HIGH

- Plasticizer blending required due to processing limitations
- Approximately 70% of PVC plasticizers are used

LOW

- Low surface strength due to the transparent PVC top layer

LOW

- Shrinkage is likely to occur when plasticizers are blended
- High possibility of poor surface flatness during summer

VS

TOXICITY OF COMBUSTION GASES DURING A FIRE

POLYPROPYLENE (PP)

Lightweight yet highly durable, it is widely used in various products including chairs, carpets, and tableware. Made from eco-friendly materials, DAGREEN Decorative Sheet also features antibacterial properties without generating harmful substances.

NONE

- No generation of toxic gases
- Non-toxic

HIGH

- Excellently blocks carcinogenic formaldehyde gas that is released over long periods from furniture-grade MDF, particle board (P/B), cement, and similar materials

NONE

- Excellently blocks carcinogenic formaldehyde gas that is released over long periods from furniture-grade MDF, particle board (P/B), cement, and similar materials

HIGH

- It contains no harmful plasticizers and is physiologically harmless to the human body.

HIGH

- Excellent thermal stability allows application in uses requiring high dimensional stability
- Excellent overlay bonding workability during summer

Unique Advantages of HANSEO MICRON's ECO-FRIENDLY PP FILM

- ✓ Does not generate harmful combustion gases in the event of a fire
- ✓ PP provides excellent barrier performance against harmful formaldehyde
- ✓ Contains no substances harmful to human health
- ✓ Offers high surface hardness
- ✓ Exhibits excellent thermal stability with no dimensional deformation
- ✓ Features a plasticizer-free structure, unlike conventional PVC decorative films
- ✓ Does not emit gases harmful to human health
- ✓ Presents very low risk of suffocation in the event of a fire
- ✓ An eco-friendly product capable of responding to increasingly stringent regulations on harmful substances such as PVC in advanced markets including the EU
- ✓ Overcomes the inherent drawbacks of PP, such as low flexural elasticity, whitening during forming, and poor membrane formability, thereby achieving formability and workability comparable to PVC products (multiple patents obtained)

HANSEO INTERIOR/EXTERIOR FILM



ABOUT HANSEO MICRON'S INTERIOR/EXTERIOR FILM

- An eco-friendly PP decorative sheet film that does not emit toxic gases in the event of a fire
- Can be used on wooden furniture, door panels, door frames, kitchen furniture, etc.
- Wide range of patterns (wood, metal, fabric, etc.) and surface textures (available in both glossy and matte surface textures with a soft, smooth feel through soft-touch processing)

+ SOFTFEEL COLOR DESIGN PP FILM

The world's first decorative film that maximizes luxurious color surface texture by applying a special coating to the surface of a PP film



HANSEO INTERIOR/EXTERIOR FILM



ABOUT HANSEO MICRON'S INTERIOR/EXTERIOR FILM

High Weather-Resistance PP Decorative Sheet

An adhesive decorative sheet made of PP material with durability against UV, heat, and moisture, designed for interior and exterior surface finishing with minimized discoloration and degradation.



PP Decorative Sheet for Flooring

When laminated with various flooring substrates such as MDF and HDF, it enables a wide range of colors and patterns, provides a sound insulation effect between floors, and offers the advantage of emitting no harmful gases in the event of a fire.



HANSEO INTERIOR/EXTERIOR FILM

PP DECORATIVE SHEET FOR STEEL PLATE LAMINATION

This product is engineered to withstand a wide range of climates as an exterior-use film. When laminated onto steel plates used for architectural exterior panels and marine interior panels, it exhibits outstanding weather resistance.



SUPER BONDING PP FILM FOR STEEL PLATE LAMINATION

SBPP film is an eco-friendly product developed to replace conventionally used PVC films and is the world's first specially developed film to dramatically enhance adhesion strength to steel plates, overcoming the limitations traditionally associated with PP films.



FABRIC DECORATIVE SHEET

By incorporating fabric substrates and applying various functional surface coatings, this product preserves the authentic texture of textiles while maximizing color expression, pattern variety, and surface texture.




HANSEO

MANUFACTURING PROCESS

STEP 01 EXTRUSION PROCESS

Through a co-extrusion method, the film is composed of three layers. Different resins are applied to each layer, enabling the production of wide variety of CPP films

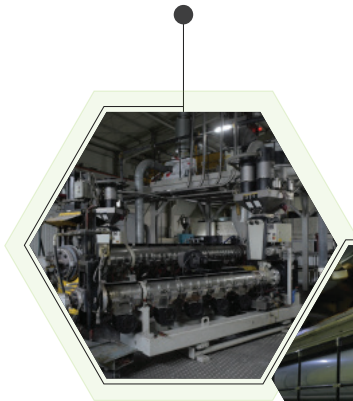

STEP 02 COOLING PROCESS

The molten material is cooled through a T-die and formed into a film



STEP 03 CORONA TREATMENT

Polar functional groups are imparted to the film surface to enhance printability and adhesion through mechanical treatment



STEP 04 AGING PROCESS

Physical properties of the film are stabilized to ensure quality uniformity and dimensional stability



STEP 05 CUTTING PROCESS

The film is precisely cut according to the intended application and specifications to ensure product completeness



STEP 06 PACKAGING PROCESS

Products are packaged according to specification in a clean environment to prevent contamination and damage, ensuring product stability






STEP 07 SHIPMENT

Products are shipped to customers after final quality inspection



HANSEO MANUFACTURING EQUIPMENT OVERVIEW

Equipment	Major Specification	Performance & Production Capacity	Equipment Status
Co-Extrusion Cast Film Line for CPP Film(#2) 	20–110 µm available - Auto. Thickness Control - Both-side corona treatment capability	- Line Speed: Up to 350 m/min. - Monthly Production Capacity: 1,700 kg/hour; approximately 1,000 tons/month - Max. Width: 3,600 mm	1 Complete Line (Full Auto.)
Recycling Machine (Recycling M/C) 	Recyclable materials: PP and PE	- Speed: Up to 55 m/min. - Maximum Monthly Production Capacity: 300 tons	1 Set
Main Slitter (SDM-380) 	- Cutting thickness range: 12–240 µm - Width: 380–3,600 mm - Domestic PROTEM brand equipment	- Max. Speed: 600 m/min. - Auto Rewinding	1 Set
MINI Slitter (SMD-250) 	- Width: Up to 2,500 mm - Equipped with AFS corona treatment system	- Speed: 600 m/min. - Corona-treated products up to 2,400 mm width	1 Set
Mini Slitter (ENR-130) 	Width: 1,600 mm & 1,300 mm	Speed: 350–550 m/min.	2 Sets
Ageing Room 	Equipped with automatic temperature and humidity control system	Temporary storage capacity for up to 250 tons	80 Mill Rolls

